

Follow This Step-By-Step Guide To Using Your Generator

1 Remove generator from package

2 Add Oil


Oil Type: SAE10W-30 Oil (Must add BEFORE first use)
Oil Capacity: 38 fluid oz (1.1 L)
Because this generator includes Low Oil Shut Off, the generator will not start with low oil)

3 Connect Fuel

Choose either LPG or Gasoline fuel. If using LPG, connect regulator that was included with the generator first to Propane Fuel Tank then to Gas Inlet. (Fig A) If using gasoline, add Unleaded gasoline only octane rating of 87 or higher. Maximum Capacity: 6.2 Gallons

4 Start Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- If using LPG, turn Fuel Switch ON Propane Tank. Always turn OFF the gasoline Fuel Petcock when using propane gas. Make sure to drain off any fuel in carburetor if gasoline was ever used. If using Gasoline, turn Fuel Petcock ON. (Figure B)
- Adjust the CHOKE to CLOSED position (Figure C)
- Start the generator manually with the Recoil (Pull) Start. To use the Electric Start, a battery must be purchased (sold separately).
- Once the engine has started and runs for about a minute, move the choke lever approximately half way towards the "Open/Run" position. Wait an additional 30 seconds and then move the choke lever completely over to the "Open/Run" position.
- You can now connect electrical devices.

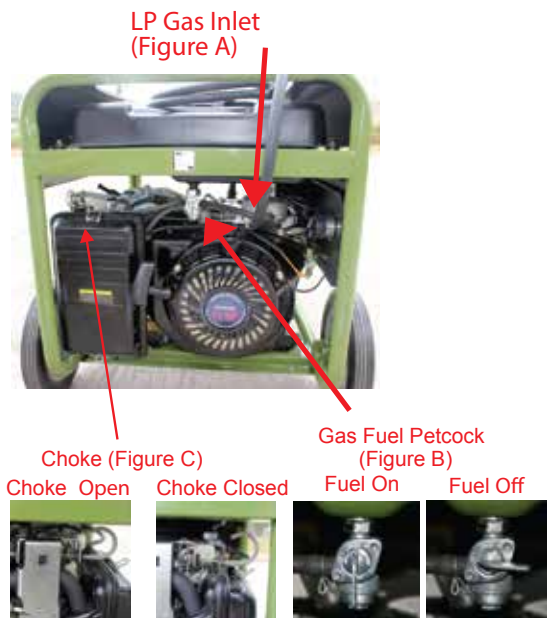

GEN7500DF

7,500 Surge / 6,000 Running Watts

DUAL FUEL GASOLINE OR PROPANE

A BATTERY IS NOT INCLUDED! TO USE THE ELECTRIC START FEATURE, BUY A BATTERY WITH THESE SPECIFICATIONS:

Dimensions: 151 mm x 99 mm x 98 mm
(6" L x 3.8" H x 3.8" W)
CCA (Cold Cranking Amps): 130 Min CCA

Comparable battery brands/models are:

- 12 Volt 12 Ah Sealed Lead Acid
- Model # CYLAZ10SXTA battery
- 120/240 Volt Operation
- 13 HP Engine, 4 Stroke OHV
- Air Cooled
- Displacement (CC): 420cc
- AVR Automatic Voltage Regulation
- Low Oil Shut Off
- Gasoline Fuel Max Capacity: 6.2 Gallon
- UL Listed Electrical Components
- 1-12V DC Outlet
- 4-120V GFCI Outlets
- 1-120/240V Twist Lock Outlet
- 1-120V RV Outlet
- Complies with EPA emissions
- Run time = 9 hours @ 50% load GAS
- Run time = 5 hours @ 50% load LPG
- Decibel Rating < 80 db
- Mobility Kit: Included
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited
- * SURGE WATTS / RUNNING WATTS MAY BE REDUCED BY 10% WHEN USING PROPANE FUEL VS USING GASOLINE.
- If you are using a generator 3,000 ft. above sea level, the generator may not function properly because of air flow getting through the carburetor.
- High Altitude Use: This generator is not recommended for high altitude use 3,000 ft. above sea level.

OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.

Read and understand instruction manual before using generator.



ATTENTION

CO WARNING ALERT!

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

Need Help? Call Customer Service!
Monday-Friday 8:00-4:00 Central Time
TOLL-FREE NATIONWIDE
HELP LINE! 866-460-9436

Outlets available on this generator, from left to right:
12V DC, 120/240V AC, 120V AC RV, and 4 each 120V AC.



Engine
Switch

12V DC

120/240V AC

120V AC RV

4 TOTAL-120V AC

DO NOT CONNECT electrical devices until AFTER the generator is started.



Battery Installation

A battery must be installed before the electric start feature can be used. Disconnect all electrical loads from this generator before installing/changing the battery.

Mount the battery tray to the generator frame by using the rubber strap to secure the battery in place.

Take the red (positive) cable from the engine and attach it to the positive terminal on the battery.

Take the black (negative) cable from the engine and attach it to the negative terminal on the battery.

GEN7500DF


7,500 Surge / 6,000 Running Watts

DUAL FUEL GASOLINE OR PROPANE

⚠ DANGER

SEEK THE ADVICE OF A LICENSED
ELECTRICIAN FOR 120V / 240V WIRING

Enlarged View Of 120/240 Volt Outlet



WARNING

IF THERE IS ANY QUESTION ABOUT A
CONDITION BEING SAFE OR UNSAFE,
DO NOT OPERATE THIS PRODUCT!

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

DO NOT CONNECT electrical devices until AFTER the generator is started.


ATTENTION

**⚠ CO
WARNING
ALERT!**

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

⚠ WARNING Carbon monoxide (also known as CO) can be dangerous for humans and pets. Carbon monoxide poisoning can lead to death in a very short time. It is called "the silent killer" because it is odorless, tasteless and invisible: you may be exposed without knowing it.

NOTE: The indicator will light RED and the engine will shutdown if dangerous Carbon Monoxide levels are detected. The engine will not restart for 5 minutes. If an error in the carbon monoxide system is detected, the indicator will blink YELLOW and the engine will shutdown for five minutes.

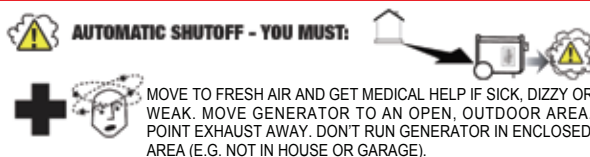

READ MANUAL FOR COMPLETE CO WARNING INSTRUCTIONS!

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436