

GPBENCH

MULTI-USE GALVANIZED STEEL BENCH INSTRUCTION MANUAL



READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT. This manual provides important information on proper operation & maintenance. Every effort has been made to ensure the accuracy of this manual. These instructions are not meant to cover every possible condition and situation that may occur. We reserve the right to change this product at any time without prior notice.

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE,
DO NOT OPERATE THIS PRODUCT!

DO NOT RETURN THIS PRODUCT TO THE RETAILER - CONTACT CUSTOMER SERVICE.

If you experience a problem, have questions or need parts for this product, visit our website at <http://www.amerihomebrand.com>, or call Customer Service at **1-888-287-6981, Monday-Friday, 8 AM - 4 PM Central Time**. A copy of the sales receipt is required.

FOR CONSUMER USE ONLY - NOT FOR PROFESSIONAL USE.

KEEP THIS MANUAL, SALES RECEIPT & APPLICABLE WARRANTY FOR FUTURE REFERENCE.


⚠ WARNING

- Do not climb, sit on, or use this product as a ladder. Injuries may occur.
- MAX CAPACITY IS 200 LBS. DO NOT PLACE ANY OBJECT HEAVIER THAN MAX CAPACITY.
- Do not place or install electrical items on this product. Electrical shock may occur if wet conditions are introduced.

ASSEMBLY

Use the illustration below as a guide to assemble the bench.

Use a 5mm hex wrench and 1/2" combination wrench for assembly.

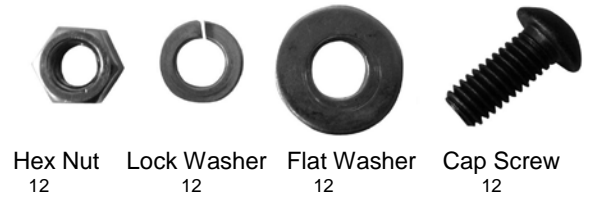

1. Place the 44" Table Top upside down on a soft surface. The soft surface will help protect the Table from scratches.
2. Place the short 30" Legs INSIDE the long edge of the table top. Use cap screw and flat washer on the outside, and finish with lock Washer and hex nut on the inside. Do not over tighten until entire unit is assembled.
3. Place the long 43" Legs OUTSIDE the long edge of the table top. Use cap screw and flat washer on the outside, and finish with lock Washer and hex nut on the inside. Do not over tighten until entire unit is assembled.
4. Place the 44" TOP SHELF on TOP of 43" LEGS. Use cap screw and flat washer on the outside, and finish with lock Washer and hex nut on the inside. Do not over tighten until entire unit is assembled.

