Step-By-Step Quick Start Guide To Using Your Generator

1 Remove Generator From Package

Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use) Oil Capacity: 13.5 fluid oz

Because this generator includes Low Oil Shut Off, the generator will not start with low oil. Start out with 13.5 oz, then **fill until almost overflowing**.)

Add Fuel Unleaded gasoline only octane rating of 87 or higher Maximum Capacity: 1.32 Gallon fuel tank

4 Start The Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- Turn Engine Switch to ON
- Turn FUEL PETCOCK to ON (Figure A)
- Adjust the CHOKE to CLOSED/CHOKE position (Figure B)
- Start the generator manually with the Recoil (Pull) Start.
- Once the engine has started, GRADUALLY move the choke lever to the "RUN/OPEN" position until the engine levels off. Then let the engine run approximately 5 minutes BEFORE adding appliances or tools.
- You can now connect electrical devices.

GEN2K

2,000 Surge / 1,800 Running Watts

UNLEADED GASOLINE FUEL

GENERATOR SPECIFICATIONS:

- 3 HP Engine, 4 Stroke OHV
- Recoil Start
- 1.32 Gallon Fuel Tank
- UL Listed Electrical Components
- · Engine Shut Off Switch
- · Circuit Breaker & Power Outlets
- 1-12V DC Outlet
- 2 -120V AC Outlets
- · Carbon Monoxide Warning Alert
- · Complies with EPA emissions
- Run time = 9 hours @ 50% load
- Decibel Rating < 68 db @ 0% load
- · Warranty: 2 YEAR Limited Emissions
- · Warranty: 1 YEAR Limited
- If you are using a generator 3,000 ft. above sea level, the generator may not function properly because of air flow getting through the carburetor.
- High Altitude Use: This generator is not recommended for high altitude use 3,000 ft. above sea level.

OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.

Read and understand instruction manual before using generator.





Fuel Petcock (Figure A)



Choke (Figure B)





Closed/Choke R

Run/Open



TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436



This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected. Need Help? Call Customer Service! Monday-Friday 8:00-4:00 Central Time






2,000 Surge / 1,800 Running Watts

UNLEADED GASOLINE FUEL

CONTROL PANEL DETAILS

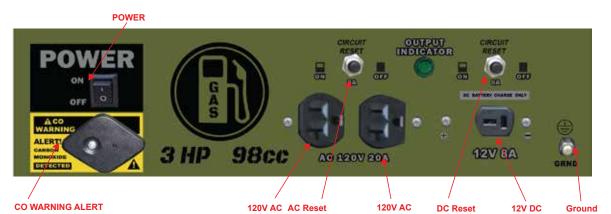

DO NOT CONNECT electrical devices until AFTER the generator is started.



IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far away from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.



READ MANUAL FOR COMPLETE CO WARNING INSTRUCTIONS!

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

Need Help? Call Customer Service! Monday-Friday 8:00-4:00 Central Time

