
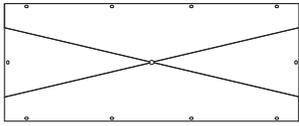





ITEM # GEP ASSEMBLY INSTRUCTIONS


200 LB WEIGHT CAPACITY

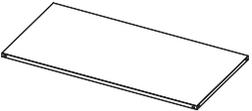

PACKAGE CONTENTS


 <p>Bottom panel (A) 1PC</p>	 <p>End panel (B) 2 PCS</p>	 <p>Side panel (C) 2 PCS</p>	 <p>Leg (D) 4 PCS</p>
 <p>Shelf (E) 1 PC</p>	 <p>Bolts (F) 32 PCS</p>	 <p>Nut (G) 32 PCS</p>	 <p>Plastic feet (H) 4 PCS</p>

- During assembly, attach screws **LOOSELY**. Tighten with cross-head screwdriver & wrench only when assembly is complete.
- The Left Legs are shorter than the Right Legs and have an additional predrilled hole on one end.
- Part edges may be sharp. Wear gloves during assembly and assemble with caution
- Do not throw away any packaging until assembly is complete. Keep parts and packaging away from children and pets.
- Assemble product on a soft surface to help prevent scratching or damaging the item.
- For ease of assembly, two people are recommended.

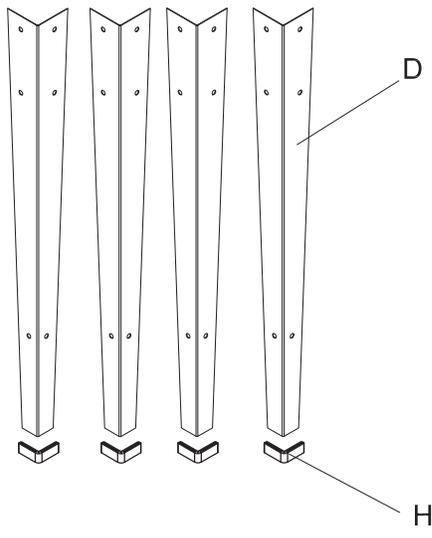


1

Slide the Plastic Feet(H) onto the ends of the Legs(D)

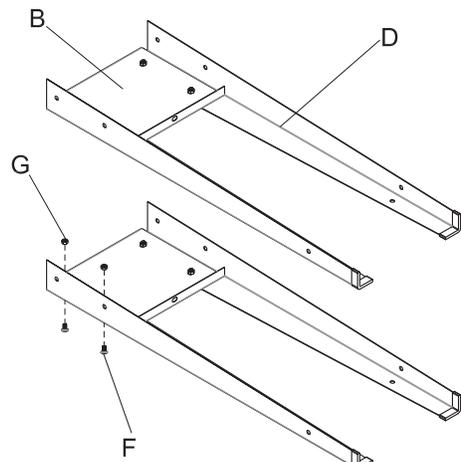

2


Line up the holes in a End Panel (B) with the holes in two of the Legs (D). NOTE: The Legs should be on the outside of the planter with the ledge on the End Panel facing in. Insert four bolts through the lined up holes, with the heads of the Bolts (F) on the outside and loosely attach nuts (G) onto the ends. Repeat Step with the remaining End Panel and Legs.

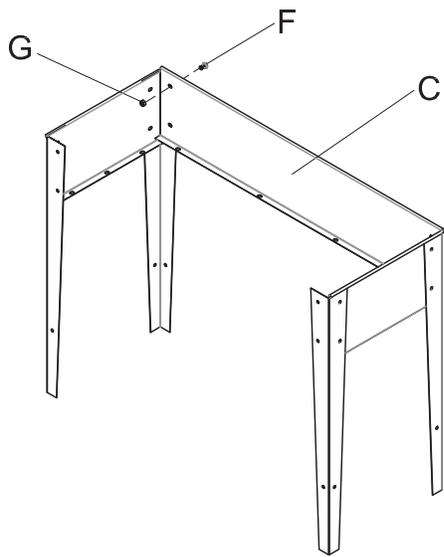

3


Carefully stand up the attached End Panels and Legs. Line up the holes in an Side Panel (C) with the remaining holes in two of the Legs. Insert a Bolt through each set of holes and loosely attach a nut onto the end of each one.

NOTE: The Legs should be on the outside of the planter with the ledge on the Side Panel facing in.

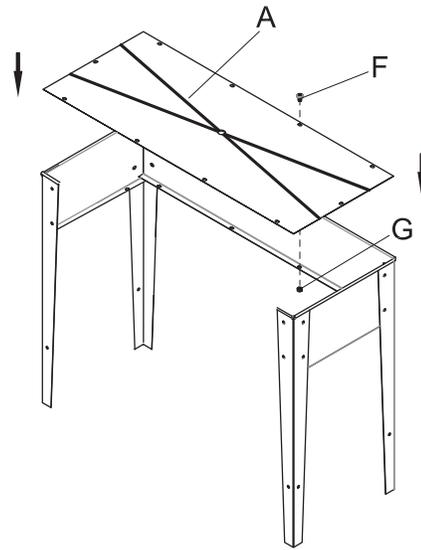


4

Place the Bottom Panel (A) into the Planter, so it is sitting on the ledges of the other panels. Line up the holes in the Bottom Panel with the holes in the ledges and insert a bolt into each set of holes, starting with the ones in the Bottom Panel, Loosely attach a nut onto the end of each bolt.

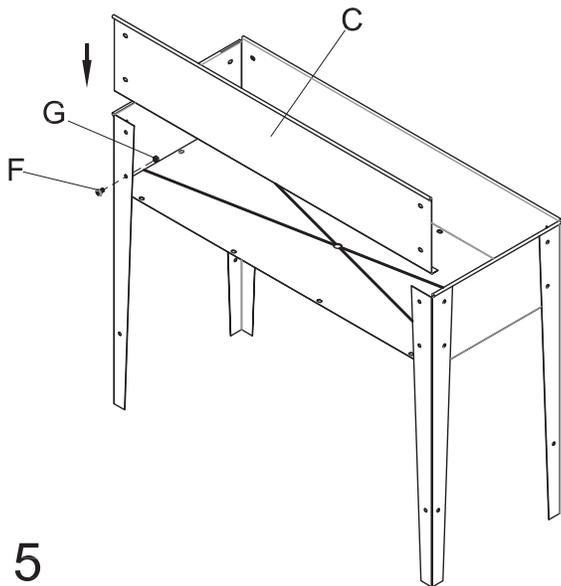

5

Take a Side Panel (C) and line up the predrilled holes with the holes in the legs. The Side Panel should be on the inside of the planter cart, the ledge on the Side Panel should be under the Bottom Panel. Insert a bolt into each set of holes and loosely attach a nut onto the end of each one.

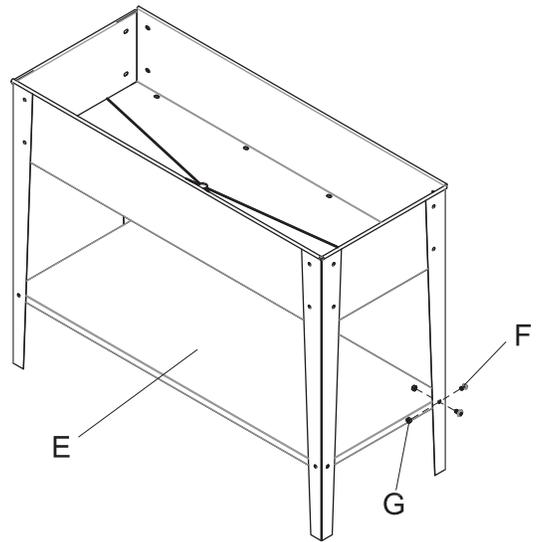

6

Position the shelf (E) between the planter cart's legs and fix its four corners to the inside of each leg with screws.

The Planter holds 3 cubic feet (77 quarts) of planting mix.

The powder-coated steel Planter Cart is weather-resistant. However if the finish is nicked or scratched, use an exterior-grade metal paint to prevent rust.